

# ECOPlanet EPD

## NORTH ISLAND – WELLINGTON – ECOPLANET (PACKAGED)

In accordance with ISO 14025 and EN15804:2012+A2:2019/AC:2021

**Program:** The International EPD® System |  
[www.environdec.com](http://www.environdec.com)  
**Program Operator:** EPD International AB  
**Regional Program Operator:** EPD Australasia Limited |  
[www.epd-australasia.com](http://www.epd-australasia.com)

**Managed By:** Holcim (New Zealand) Ltd  
**EPD Process Certificate No.** 1012  
**Verified Accreditation Body:**  
Epsten Group, Inc.

**EPD Registration No.** EPD-IES-0024211  
**Valid From** 2025-06-13 | 2030-06-13  
**Revision Date:** 2025-06-13  
**Revision Number:** 1.0  
**Geographical Scope:** New Zealand



An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).

# PROGRAM-RELATED INFORMATION AND VERIFICATION

**CEN standard EN 15804:2012+A2:2019/AC:2021 served as the core PCR**

Declaration Owner		<b>Dave Darlow</b> <b>Holcim (New Zealand) Ltd</b> 23 Plumer Street, Central Auckland 1010, New Zealand <a href="http://www.holcim.co.nz">www.holcim.co.nz</a>
Program Operator		<b>EPD International AB,</b> Box 210 60, SE-100 31 Stockholm, Sweden <a href="http://www.environdec.com">www.environdec.com</a>   <a href="mailto:info@environdec.com">info@environdec.com</a>
Regional Program Operator		<b>EPD Australasia Limited</b> 315a Hardy Street Nelson 7010, New Zealand <a href="http://www.epd-australasia.com">www.epd-australasia.com</a>   <a href="mailto:info@epd-australasia.com">info@epd-australasia.com</a> +61 2 8005 8206
Life Cycle Assessment (LCA)		<b>Jonas Bengtsson, Pasindu Samarakkody &amp; Weiqi Xing</b> <b>Edge Environment Pty Ltd</b> Level 3, Greenhouse, 180 George Street, Sydney NSW 2000 Australia <a href="http://www.edgeimpact.global">www.edgeimpact.global</a> +61 2 9438 0100
EPD Process Certified by		<b>Epsten Group</b> Suite 2600, 101 Marietta St NW, Atlanta, Georgia 30303, USA <a href="http://www.epstengroup.com">www.epstengroup.com</a>
EPD Registration Number	EPD-IES-0024211	
Valid From	2025-06-13	
Version	1.0	
Valid Until	2030-06-13	
Product group classification	<b>UN CPC 374</b>	
Geographical Scope	New Zealand	
Reference Year for Data	2021 Plant Data, 2025 Mix/Materials Data	
Product category rules	c-PCR-001 Cement and Building Lime (EN16908), 2024-04-30 PCR 2019:14 Construction Products and Construction Services, Version 1.3.4, 2024-04-30	
PCR review was conducted by	The Technical Committee of the International EPD® System. Chair: Claudia A. Peña. Contact via <a href="mailto:info@environdec.com">info@environdec.com</a>	
Independent third-party verification of the declaration and data, according to ISO 14025:2006:	<input checked="" type="checkbox"/> EPD process certification <input type="checkbox"/> EPD verification	
EPD Process Certified by	Epsten Group, Inc. Accredited by: A2LA, Certificate #3142.03	
Procedure for follow-up of data during EPD validity involves third party verifier:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	

## Programme-related information and verification

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.



# CONTENTS

INTRODUCTION	1
ABOUT HOLCIM NEW ZEALAND	2
HOLCIM NZ’S CEMENT AT A GLANCE	3
LCA INFORMATION	4
EPD PRODUCT DESCRIPTION AND USE	7
ENVIRONMENTAL PERFORMANCE	9
PREVIOUS VERSION	15
REFERENCES	16

Revision Number	Revision Date	Description of Changes
1.0	2025-06-13	N/A

# INTRODUCTION

Cement is a key ingredient in the most commonly used building material in the world. Each year in New Zealand, over 1.5 million tonnes of traditional cement is used, generating 1.23 million tonnes of CO<sub>2</sub>.<sup>1</sup>

This clearly demonstrates both the essential need for construction materials now and in the future, as well as the necessity for the construction materials industry to be a leading part of the solution addressing climate change.

With Aotearoa committed to net zero by 2050, Holcim New Zealand is building progress for a lower carbon footprint in the built environment.

For us, building progress means a complete range of green, high-performance, and specialty cement and cement binders suitable for Aotearoa's homes, buildings, and infrastructure. It means advice, tools and resources to help you specify your next project with confidence. It means solutions that are right for you each and every time.

**Together, we can build better  
to help decarbonise Aotearoa.**

---

<sup>1</sup> International Energy Agency (IEA) report *"The Future of Cement in a Carbon-Constrained World"* (2018); Cement and Concrete Association of New Zealand - Key Facts and Figures; The International Energy Agency (IEA) Cement Technology Roadmap 2009 estimates that the production of 1 tonne of cement results in the emission of approximately 0.82 tonnes of CO<sub>2</sub>. Using the conversion factor of 0.82 tonnes of CO<sub>2</sub> per tonne of cement, the production of 1.5 million tonnes of cement in New Zealand would result in the emission of approximately 1.23 million tonnes of CO<sub>2</sub>. The actual amount of CO<sub>2</sub> emissions may vary.



# ABOUT HOLCIM NEW ZEALAND

## BUILDING PROGRESS

Holcim New Zealand (NZ) is a leading solutions provider for your design and construction needs in New Zealand, dating back to 1888. Today, we supply essential construction materials from import terminals, depots, and quarries to customers. Our cement and aggregates are used in ready-mix concrete, engineered precast concrete, and prestressed concrete solutions for various projects throughout the country.

This EPD provides our stakeholders with confidence about the environmental impact of our products.

Globally, Holcim is 60,000 people around the world who are passionate about building progress for people and the planet through four business segments: Cement, Ready-Mix Concrete, Aggregates and Solutions & Products.

Sustainability is at the core of our global strategy, with our industry's first 2030 and 2050 net-zero targets validated by the Science Based Targets initiative for all scopes. We are leading the transition towards low-carbon construction and driving a circular economy by providing materials and solutions that are re-shaping the way our industry builds. Holcim NZ has developed a range of green cements and cement replacements specifically for the New Zealand market.



# HOLCIM NZ'S CEMENT AT A GLANCE

Holcim NZ provides project-specific, on-demand Environmental Product Declarations (EPDs) to customers. This capability represents a significant step in Holcim NZ's sustainability journey and embodies our multi-disciplinary approach to embedding sustainability into our organisation and operations. With the introduction of our cement blends, third-party verified data will underpin our capability to work with our customers from tender through to design and construction to optimise sustainability performance.

Holcim NZ's cement blend is backed by an EPD Process Certification. Our EPD Process Certification is a stamp of approval to produce compliant EPDs in-house, opening up significant capability and flexibility in producing and using life cycle impact data to inform our operations and our customers.

To gain our EPD Process Certification, Holcim invested in embedding Life Cycle Assessment (LCA) into our systems and processes. We have satisfied a rigorous, third-party evaluation in accordance with the relevant ISO standards and guidelines of the International EPD Program and EPD Australasia.<sup>2</sup>

This EPD has been developed using our EPD Process Certification for ECOPlanet with production occurring at Wellington.



---

<sup>2</sup> 5-6 and 8-12 in the References section.

# LCA INFORMATION

## Declared Unit

1 tonne of cement blend in 20/40 kg bags.

## Manufacturing Location

Wellington Depot, Wellington, New Zealand.

## Reference Service Life (RSL)

The RSL is not specified as the scope is from cradle to gate (modules A1-A3).

## Time Representativeness

The plant data for the LCA is based on 2021 calendar year production data. The mix data for the LCA is based on 2023 calendar year production data.

## Databases and LCA Software Used

SimaPro® LCA software (v 10.2) was used for the LCA modelling which developed the LCA Calculator, used as per the certified EPD Process. It uses background data from:

- Ecoinvent 3.11 (2024) database was used as the primary source for inventory data. At the time of this report, this ecoinvent database version is less than 1 year old.

The environmental impacts modelled from the existing EPDs do not include impacts for the additional Green Star (v1.3) impact categories included in the environmental impact tables. The following impact categories were calculated manually for the foreground data:

- Use of renewable primary energy resources used as raw materials
- Use of non-renewable primary energy, excluding non-renewable primary energy resources used as raw materials
- Use of secondary materials
- Use of renewable secondary fuels
- Use of non-renewable secondary fuels

## LCA Methodology

This EPD has been produced in conformance with the requirements of:

- c-PCR-001 Cement and Building Lime (EN16908)
- Product Category Rules (PCR) 2019:14 v1.3.4
- EN 15804+A2
- General Program Instructions (GPI) v5.0
- Instructions of EPD Australasia v4.2
- EN 14040 and EN 14044

## Allocation

Allocation was necessary to proportion inputs and outputs to intermediate flows and processes at the plant level. As much as possible, intermediate flows were allocated physically based on the weight of cement.

Fly ash and ground granulated blast furnace slag were allocated economically. Please refer to the "Recycled Material" section for further detail.

## Cut-Off Criteria

No flows were excluded on the basis of cut-off criteria except for the infrastructure and personnel-related impacts.

### Address and Contact Information

Dave Darlow | dave.darlow@holcim.com

Holcim (New Zealand) Ltd  
23 Plumer Street, Central Auckland 1010 New Zealand

## Data Quality

Schemes for data quality assessment of generic and specific data from EN 15804+A2 are used to perform this data quality assessment activity.

Data quality for the foreground data was assessed in terms of geographic, technical and temporal representativeness. All data sources were scored good or very good. Background data sources were also assessed with respect to their timeliness, with all data sources being updated within the 10 years required under PCR 2019:14.

## Upstream processes

The upstream processes include those involved in Module A1 – raw material supply. This module includes:

- Extraction, transport, and manufacturing of raw materials.
- Generation of electricity from primary and secondary energy resources, also including their extraction, refining and transport for Modules A1.

## Core processes

The core processes include those involved in Module A2 and Module A3 – upstream raw material transport and manufacturing. They include:

- External transportation of materials to the core processes and internal transport, via truck and ship.
- Manufacturing of cement, and packaging if needed.
- Transportation of materials for recycling and landfilling externally
- Treatment of waste and wastewater generated from the manufacturing processes.


Cement manufacturing is undertaken at two plants and seven depots. GP cement is imported from Japan to Auckland and Timaru plants and can be sold directly to the customers in bulk. Seven depots are used for packaging. Holcim NZ provided data on the consumption of electricity, diesel, and natural gas at each plant and depot. Site specific manufacturing data was collected during FY21.

The electricity for manufacturing process is from the electricity grid in New Zealand, which comprises 58% of hydropower, 18% of geothermal, 12% of natural gas, 6% of wind power, and 6% of other energy sources. The GWP-GHG is 0.137 kg CO<sub>2</sub> eq./kWh of electricity.



## SYSTEM DIAGRAM

The processes included in the LCA are presented in a process diagram in the figure below.

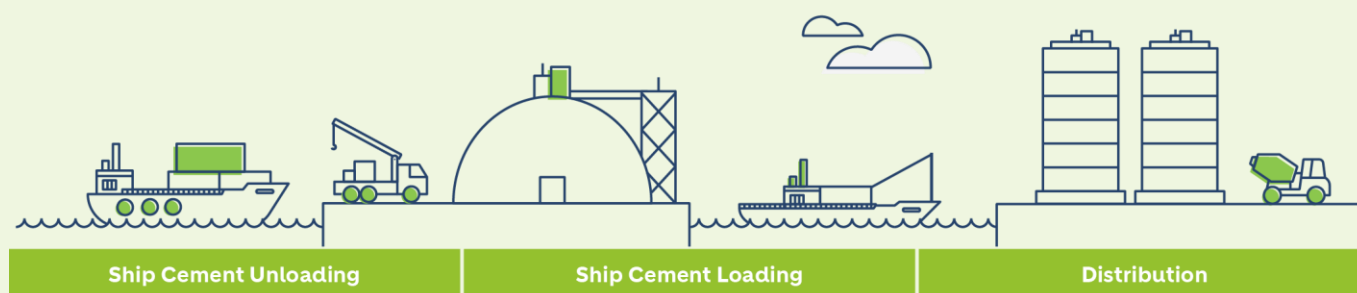

## DESCRIPTION OF SYSTEM BOUNDARIES AND EXCLUDED LIFECYCLE STAGES

The scope of the LCA and EPD is from cradle to gate with options, including A1-A3 and additional module A4. Emissions from distribution (A4) and construction installation (A5) were excluded as this EPD does not include site-specific delivery and Holcim does not have operational control over the installation of products at the construction site. In addition, the following life cycle stages were also excluded: use stages (B1-B7), end of life stage (C1-C4), and benefits and loads beyond the system boundary (D)

Environmental impacts relating to personnel, infrastructure and production equipment not directly consumed in the process are excluded from the system boundary as per the Product Category Rules (2019:14 Construction Production and Construction Services).

	Product Stage			Construction Stage		Use Stage							End of Life Stage				Benefits & loads for the next product system
	Raw Material Supply	Transport	Manufacturing	Transport	Construction/Installation process	Use	Maintenance incl. transport	Repair incl. transport	Replacement incl. transport	Refurbishment incl. transport	Operational Energy Use	Operational Water Use	De-construction & Demolition	Transport	Re-use Recycling	Final Disposal	Reuse, Recovery Recycling potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Geography	GLO	GLO	NZ	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Share of specific data	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

**ND:** Not declared


# EPD PRODUCT DESCRIPTION AND USE

## HOLCIM NZ'S CEMENTITIOUS PRODUCTS NORTH ISLAND – WELLINGTON – ECOPLANET (PACKAGED)

A detailed breakdown of the functional properties of the cement included in this EPD are provided below. Product environmental information should only be compared with consideration of the product's requisite function.

ECOPlanet is a blended cement, designated in the NZS3122 standard as a Type GB cement.

### Manufacturing process and flow diagram

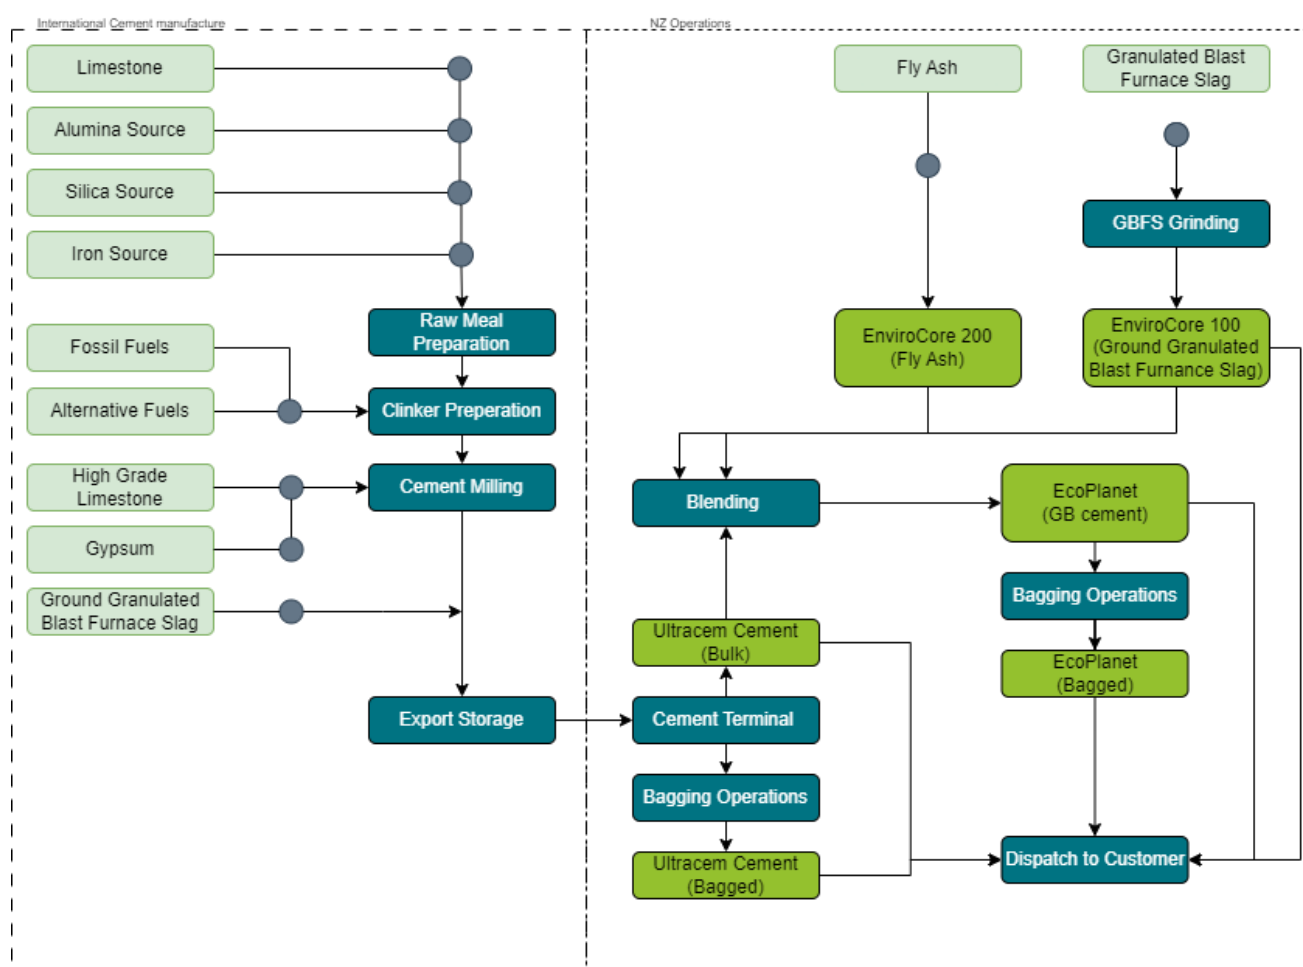

## Content Declaration

The following table provides a summary of the materials included in Holcim's cement and their relative composition by weight. The gross weight of this declared material makes up a minimum of 99% of the products covered by this EPD.

### Packaging

ECOPlanet is delivered in 20/40 kg kraft paper bags.

### Recycled Material

The following materials relevant to the study are considered as co-products of their production process and the impacts for their production process are allocated according to PCR 2019:14 Construction Products and Construction Services (co-produced goods, multi-output allocation):

- Fly ash; and
- Ground granulated blast furnace slag

Economic allocation method was used to model the above co-products:

- Fly ash: fly ash in the modelling process only includes transport impacts. It is sourced directly from coal fired electricity generation, with no further processing required. Given its relatively low market value compared to the primary energy product, the environmental impacts of coal combustion allocated via economic allocation are negligible.
- Ground granulated blast furnace slag: No environmental impact is allocated to the granulated blast furnace slag at the point of its generation from steel production as a by-product. However, the specific energy and processing impacts associated with grinding the slag into GGBFS are included.

Product component(s)	Hazardous content	Weight (%)	Post-consumer material (%)	Biogenic material (%)	Biogenic material (kg C/tonne of product)
<b>Portland Cement</b>	✓	<b>67%</b>	<b>0</b>	<b>0</b>	<b>0</b>
- Clinker		≥ 85	0	0	0
- GGBFS		≤ 5	0	0	0
- High Grade Limestone		≥ 3	0	0	0
- Gypsum		3-5	0	0	0
Fly Ash	✓	<b>29%</b>	0	0	0
Packaging material	Hazardous content	Weight (%)	Post-consumer material (%)	Biogenic material (kg C/tonne of product)	
Paper bag		<b>4.75</b>	0	2.20*	

\*The biogenic carbon of packaging material is balanced out in the environmental impacts of modules A1-A3 aligning with the requirements from ANNEX 2 of PCR

The product does not contain one or more substances that are listed in the "Candidate List of Substances of Very High Concern For Authorisation".

# ENVIRONMENTAL PERFORMANCE

The environmental impacts considered in this EPD are listed in the table below. They are aligned to and adopted from EN15804+A2 version of Environmental Footprint 3.1. All further tables from this point will contain abbreviation only. The potential environmental performance is calculated based on the input data and the emission factors from ecoinvent v3.11. The LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds and safety margins or risks.

The results generated by module A1-A3 should not be used in isolation. It is strongly advised that the outcomes produced by modules A1-A3 are considered alongside the results derived from module C to ensure comprehensiveness and accurate analysis.

Impact Category	Abbreviation	Measurement	Assessment Method and Implementation
<b>Potential Environmental Impacts</b>			
Total global warming potential	GWPT	kg CO <sub>2</sub> equivalents (GWP100)	Baseline model of 100 years of the IPCC based on IPCC 2021
Global warming potential (fossil)	GWPF	kg CO <sub>2</sub> equivalents (GWP100)	Baseline model of 100 years of the IPCC based on IPCC 2021
Global warming potential (biogenic)	GWPB	kg CO <sub>2</sub> equivalents (GWP100)	Baseline model of 100 years of the IPCC based on IPCC 2021
Global warming potential (land use/ land transformation)	GWPL	kg CO <sub>2</sub> equivalents (GWP100)	Baseline model of 100 years of the IPCC based on IPCC 2021
Ozone depletion potential	ODP	kg CFC 11 equivalents	Steady-state ODPs, WMO 2014
Acidification potential	AP	mol H <sup>+</sup> eq.	Accumulated Exceedance, Seppälä et al. 2006, Posch et al., 2008
Eutrophication – aquatic freshwater	EP - freshwater	kg P equivalent	EUTREND model, Struijs et al., 2009b, as implemented in ReCiPe
Eutrophication – aquatic marine	EP - marine	kg N equivalent	EUTREND model, Struijs et al., 2009b, as implemented in ReCiPe
Eutrophication – terrestrial	EP – terrestrial	mol N equivalent	Accumulated Exceedance, Seppälä et al. 2006, Posch et al.
Photochemical ozone creation potential	POCP	kg NMVOC equivalents	LOTOS-EUROS, Van Zelm et al., 2008, as applied in ReCiPe
Abiotic depletion potential (elements)*	ADPE	kg Sb equivalents	CML (v4.8)
Abiotic depletion potential (fossil fuels)*	ADPF	MJ net calorific value	CML (v4.8)
Water Depletion Potential**	WDP	m <sup>3</sup> equivalent deprived	Available Water Remaining (AWARE) Boulay et al., 2016
<b>Resource use</b>			
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	PERE	MJ, net calorific value	Manual for direct inputs
Use of renewable primary energy resources used as raw materials	PERM	MJ, net calorific value	Manual for direct inputs <sup>3</sup>
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	PERT	MJ, net calorific value	ecoinvent version 3.11 and expanded by PRé Consultants <sup>4</sup>
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	PENRE	MJ, net calorific value	Manual for direct inputs

<sup>3</sup> Calculated based on the lower heating value (LHV) of renewable raw materials. LHV is taken from <https://phyllis.nl/>, as recommended by SimaPro in compliance with EN15804+A2: <https://support.simapro.com/s/article/How-to-calculate-EN-15804-A2-indicators-in-desktop-SimaPro>

<sup>4</sup> Calculated as sum of renewable, biomass; renewable, wind, solar and geothermal, and renewable, water.

Impact Category	Abbreviation	Measurement	Assessment Method and Implementation
Use of non-renewable primary energy resources used as raw materials	PENRM	MJ, net calorific value	Manual for direct inputs <sup>5</sup>
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	PENRT	MJ, net calorific value	ecoinvent version 3.11 and expanded by PRé Consultants <sup>6</sup>
Use of secondary material	SM	kg	Manual for direct inputs
Use of renewable secondary fuels	RSF	MJ, net calorific value	Manual for direct inputs
Use of non-renewable secondary fuels	NRSF	MJ, net calorific value	Manual for direct inputs
Use of net fresh water	FW	m <sup>3</sup>	ReCiPe 2016
<b>Waste categories and Output flows</b>			
Hazardous waste disposed	HWD	kg	EDIP 2003 (v1.05)
Non-hazardous waste disposed	NHWD	kg	EDIP 2003 (v1.05) <sup>7</sup>
Radioactive waste disposed/stored	RWD	kg	EDIP 2003 (v1.05)
Components for reuse	CFR	kg	Manual for direct inputs
Materials for recycling	MFR	kg	Manual for direct inputs
Materials for energy recovery	MFEE	kg	Manual for direct inputs
Exported energy	EE - e	MJ per energy carrier	Manual for direct inputs
Exported energy, thermal	EE - t	MJ per energy carrier	Manual for direct inputs
<b>Additional environmental impacts</b>			
Global warming potential, excluding biogenic uptake, emissions and storage	GWP-GHG	kg CO <sub>2</sub> equivalents (GWP100)	Baseline model of 100 years of the IPCC based on IPCC 2021 <sup>8</sup>
Particulate matter	PM	disease incidence	SETAC-UNEP, Fantke et al. 2016 <sup>9</sup>
Ionising radiation - human health**	IRP	kBq U-235 eq	Human health effect model
Eco-toxicity (freshwater)*	ETP-fw	CTUe	Usetox
Human toxicity potential - cancer effects*	HTP-c	CTUh	Usetox
Human toxicity potential - non cancer effects*	HTP-nc	CTUh	Usetox
Soil quality*	SQP	dimensionless	Soil quality index based on LANCA
Global warming potential, aligned with the IPCC 2013 Fifth Assessment Report	GWP-GHG (AR5)	kg CO <sub>2</sub> equivalents (GWP100)	Baseline model of 100 years of the IPCC based on IPCC 2013 AR5

\* Disclaimer 1 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

\*\* Disclaimer 2 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionising radiation from the soil, from radon and from some construction materials is also not measured by this indicator.<sup>10</sup>

<sup>5</sup> Calculated based on the lower heating value (LHV) of non-renewable raw materials. LHV is taken from <https://phyllis.nl/>, as recommended by SimaPro in compliance with EN15804+A2: <https://support.simapro.com/s/article/How-to-calculate-EN-15804-A2-indicators-in-desktop-SimaPro>

<sup>6</sup> Calculated as sum of non-renewable, fossil and non-renewable, nuclear.

<sup>7</sup> Calculated as sum of Bulk waste and Slags/ash.

<sup>8</sup> This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO<sub>2</sub> is set to zero.

<sup>9</sup> Fantke et al., Global Guidance for Life Cycle Impact Assessment Indicators: Volume 1. UNEP/SETAC Life Cycle Initiative, Paris, pp. 76-99

<sup>10</sup> Aligned with PCR 2019:14



## NORTH ISLAND – WELLINGTON – ECOPLANET (PACKAGED) – MODULE A1-A3

The interpretation of results is presented in the following sections. Note that the use of results of modules A1-A3 or A1-A5, without considering the results of module C may mislead the communication and decision-making. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

### Primary indicators – 1 tonne of cement blend

Table 1 | Core environmental impacts per tonne of ECOPlanet (Bagged) - Wellington (results are in accordance with EN15804+A2:2019)

Indicator	Indicator	Unit	A1-A3	A4
Total global warming potential	GWP-Total	kg CO <sub>2</sub> eq.	6.39E+02	ND
Global warming potential (fossil)	GWP-Fossil	kg CO <sub>2</sub> eq.	6.39E+02	ND
Global warming potential (biogenic)	GWP-Biogenic	kg CO <sub>2</sub> eq.	1.57E-01	ND
Global warming potential (land use/ land transformation)	GWP-Luluc	kg CO <sub>2</sub> eq.	2.89E-02	ND
Ozone depletion potential	ODP	kg CFC 11 eq.	3.10E-06	ND
Acidification potential	AP	mol H <sup>+</sup> eq.	4.15E+00	ND
Eutrophication – aquatic freshwater	EP-F	kg P eq.	1.25E-02	ND
Eutrophication – aquatic marine	EP-M	kg N eq.	1.09E+00	ND
Eutrophication – terrestrial	EP-T	mol N eq.	1.21E+01	ND
Photochemical ozone creation potential	POCP	kg NMVOC eq.	3.28E+00	ND
Abiotic depletion potential (elements)	ADPE	kg Sb eq.	8.18E-06	ND
Abiotic depletion potential (fossil fuels)	ADPF	MJ	3.27E+03	ND
Water Depletion Potential	WDP	m <sup>3</sup> eq deprived	1.52E+02	ND

Table 2 | Additional mandatory environmental impacts per tonne of ECOPlanet (Bagged) - Wellington (results are in accordance with EN15804+A2:2019)

Indicator	Indicator	Unit	A1-A3	A4
Global warming potential, excluding biogenic uptake, emissions and storage	GWP-GHG	kg CO <sub>2</sub> eq.	6.39E+02	ND

## NORTH ISLAND – WELLINGTON – ECOPLANET (PACKAGED) – MODULE A1-A3

### Additional indicators 1 tonne of cement blend

Table 3 | Additional voluntary environmental impacts per tonne of kg CO<sub>2</sub> eq. (results are in accordance with EN15804+A2:2019)

Indicator	Indicator	Unit	A1-A3	A4
Particulate matter	PM	disease incidence	8.27E-06	ND
Ionising radiation - human health	IRP	kBq U-235 eq	5.35E-01	ND
Eco-toxicity (freshwater)	ETP-fw	CTUe	3.58E+02	ND
Human toxicity potential - cancer effects	HTP-c	CTUh	3.80E-08	ND
Human toxicity potential - non cancer effects	HTP-nc	CTUh	9.29E-07	ND
Soil quality	SQP	dimensionless	1.36E+03	ND
Global warming potential, aligned with the IPCC 2013 Fifth Assessment Report	GWP-GHG (AR5)	kg CO <sub>2</sub> eq.	6.40E+02	ND

## NORTH ISLAND – WELLINGTON – ECOPLANET (PACKAGED) – MODULE A1-A3

### Resource use parameters - 1 tonne of cement blend

Table 4 | Resource use per tonne of ECOPlanet (Bagged) - Wellington (results are in accordance with EN15804+A2:2019)

Indicator	Indicator	Unit	A1-A3	A4
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	PERE	MJ <sub>NCV</sub>	4.72E+02	ND
Use of renewable primary energy resources used as raw materials	PERM	MJ <sub>NCV</sub>	0.00E+00	ND
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	PERT	MJ <sub>NCV</sub>	4.72E+02	ND
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	PENRE	MJ <sub>NCV</sub>	3.24E+03	ND
Use of non-renewable primary energy resources used as raw materials	PENRM	MJ <sub>NCV</sub>	0.00E+00	ND
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	PENRT	MJ <sub>NCV</sub>	3.24E+03	ND
Use of secondary material	SM	kg	5.12E+02	ND
Use of renewable secondary fuels	RSF	MJ <sub>NCV</sub>	1.32E+02	ND
Use of non-renewable secondary fuels	NRSF	MJ <sub>NCV</sub>	2.34E+02	ND
Use of net fresh water	FW	m <sup>3</sup>	3.55E+00	ND

## NORTH ISLAND – WELLINGTON – ECOPLANET (PACKAGED) – MODULE A1-A3

### Waste categories and output flows - 1 tonne of cement blend

Table 5 | Waste generated and output flows per m3 of ECOPlanet (Bagged) - Wellington (results are in accordance with EN15804+A2:2019)

Indicator	Indicator	Unit	A1-A3	A4
Hazardous waste disposed	HWD	kg	3.67E-04	ND
Non-hazardous waste disposed	NHWD	kg	1.55E-02	ND
Radioactive waste disposed/stored	RWD	kg	2.83E-06	ND
Components for reuse	CRU	kg	0.00E+00	ND
Materials for recycling	MFR	kg	0.00E+00	ND
Materials for energy recovery	MFRE	kg	0.00E+00	ND
Exported energy	EE - e	MJ	0.00E+00	ND
Exported energy, thermal	EE - t	MJ	0.00E+00	ND

# PREVIOUS VERSION

N/A



# REFERENCES

1. Australasian EPD Program. (2017). Guidance on the use of INA in EPDs.
2. Australasian EPD Program. (2018). Guidance on the use of background LCI data.
3. Australasian EPD Program (2023). Instructions of the Australasian EPD Program V4.2.
4. British Standards Institution. (2019). Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products, BS EN 15804:2012+A2:2019. British Standards Institution.
5. British Standards Institution. (2022). Sustainability of construction works – Environmental product declarations – Product Category Rules for cement and building lime, BS EN 16908. British Standards Institution.
6. Ecoinvent Centre. (2024). Ecoinvent version 3.11 database. Zurich: ETH, Agroscope, EMPA, EPFL, PSI. Retrieved from [www.ecoinvent.org](http://www.ecoinvent.org).
7. EPD International. (2024). General Program Instructions (GPI) for the International EPD System V5.0. Retrieved from [www.envirodec.com](http://www.envirodec.com).
8. EPD International. (2024). Product Category Rules for Construction Products and Construction Services, PCR2019:14 v1.3.4. Stockholm: EPD International.
9. ISO. (2006). Environmental labels and declarations – Type III environmental declarations – Principles and procedures, ISO 14025:2006. Geneva: International Organization for Standardization.
10. ISO. (2006). Environmental management – Life cycle assessment – Principles and framework, ISO 14040:2006. Geneva: International Organization for Standardization.
11. ISO. (2018). Environmental management. Life cycle assessment. Requirements and guidelines, ISO 14044:2006+A1:2018. Geneva: International Organization for Standardization.
12. Man Yu, Thomes Wiedmann, Robert Crawford, Catriona Tait, 'The Carbon Footprint of New Zealand's Construction Sector', Procedia Engineering, Volume 180, 2017, Pages 211-220, ISSN 1877-7058, (<http://www.sciencedirect.com/science/article/pii/S1877705817316879>)

**Contact your Holcim representative  
today for more information.**

**Holcim (New Zealand) Ltd**  
23 Plumer Street  
Central Auckland  
New Zealand

T 0800 465 246  
[www.holcim.co.nz](http://www.holcim.co.nz)

This publication supersedes all previous literature on this subject. As the specifications and details contained in this publication may change, please check with Holcim Customer Service for confirmation of current issue. This publication provides general information only and is no substitute for professional technical engineering advice. Users must make their own determination as to the suitability of this information or any Holcim product for their specific circumstances. Holcim accepts no liability for any loss or damage resulting from their specific circumstances. Holcim accepts no liability for any loss or damage resulting from any reliance on the information provided in this publication. Holcim is a registered trademark of Holcim Ltd.

© June 2025 Holcim (New Zealand) Ltd  
All rights reserved. This guide or any part of it may not be reproduced

