

ENVIRONMENTAL PRODUCT DECLARATION

**DRURY –
SPEC CONCRETE, DRAINAGE,
SEALING CHIP & BASECOURSE**

EPD of multiple products, based on the average results of the product group. A full list of products covered by this EPD is presented within this document on page 8.

Programme:	The International EPD® System www.environdec.com
Programme operator:	EPD International AB
Regional programme operator:	EPD Australasia www.epd-australasia.com
EPD registration number:	EPD-IES-0018195:001
Publication date:	2024-12-05
Valid until:	2029-12-05
Version number:	1.0
Geographical scope:	New Zealand

Environmental Product Declaration in accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com.



PLANET EARTH. TEST WE'RE QUARRYING FOR THE FUTURE

At Stevenson Aggregates, we recognise the importance of providing transparent and independently verified environmental impact information about our products.

An Environmental Product Declaration (EPD) is a robust, science-based, independently verified and standardised method for communicating the environmental impacts of products.

This EPD groups the environmental impacts of Spec Concrete, Drainage, Sealing Chip & Basecourse aggregate products from our Drury production site.

Our concrete aggregates are manufactured in accordance with NZS3121:2015. All other aggregates are manufactured to national or regional aggregate specifications or non-spec general products.

To create this EPD, we collected extensive data throughout the process of extracting and manufacturing our products. It is based on a cradle-to-gate Life Cycle Assessment (LCA). 'Cradle' refers to the raw material extraction and 'the gate' is the gate of Stevenson Aggregates where the product is ready to go out to customers.

As the EPD owner, Stevenson has the sole ownership, liability and responsibility for the EPD.

An EPD is a standardised and verified way of quantifying the environmental impacts of a product based on a consistent set of rules known as a PCR (Product Category Rules).

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804+A2:2019.

2	INTRODUCTION
	Environmental Product Declaration
4	ABOUT
	Stevenson Aggregates
	Our commitment to sustainability
6	AGGREGATES
	Location of our quarries
	Product life cycle
8	PRODUCTS
	Products included in this EPD
	Product composition
10	TECHNICAL INFORMATION
	Declared Unit and Industry Classification
	System Boundary
	Lifecycle Inventory (LCI) Data and Assumptions
	Introduction to Environmental Impact Indicators
16	RESULTS A1-A3
20	GLOSSARY AND REFERENCES
23	PROGRAMME-RELATED INFORMATION



STEVENSON AGGREGATES

Over a hundred years ago, three pioneers from the Stevenson family transformed their modest drainage business into the large reputable organisation that Stevenson is today. We're an experienced team of industry forerunners dedicated to cutting-edge technology and values that take care of our people, our communities, and our planet.

Stevenson has a strong community focus and a culture built on loyalty and determination. We are environmentally responsible and our team is committed to innovation, new technologies and processes to improve our products. By applying up-to-date processes in our quarrying, we can provide the best quality solutions for our customers and the environment.

After decades in the sector, we have gained valuable industry insights and knowledge. Now a division of the large infrastructure company Fulton Hogan, Stevenson continues to be a thriving and successful business.

The leadership team at Stevenson is made up of a group of experienced and well-informed industry experts who strive to build a culture of inclusiveness.

We make it a priority to invest and engage with our staff, and our values-led culture is a core part of the business. It contributes to the success of securing long-serving and loyal staff members. We have a strong focus on personal development and offer our people varied career opportunities and several leadership programmes.

Stevenson prides itself on being a good neighbour through connecting and partnering with the people in our local community. We work alongside our communities to make sure we are supporting both the people and the environment.

At Stevenson, we are excited about quarrying for the future. We deliver a range of high-quality aggregate solutions for use in large-scale roading and infrastructure projects and heavy-duty pavements throughout New Zealand.

OUR COMMITMENT TO SUSTAINABILITY

Reducing our impact on the environment is our priority at Stevenson Aggregates. We focus on new technologies and processes so we can provide the best quality solutions for our customers and the environment.

We work with ecological consultants to remove pest plants, weed infestations and eradicate pests. Pest control includes fencing, trapping and bait stations. Through these measures, we have seen an increase in the native bird population and native seedling germination across many of our sites, improving the local ecosystem.

At our largest site Drury, Stevenson Aggregates has planted approximately 85,500 eco-sourced native seedlings and is partway

through an eight-year ecological restoration programme that provides critical habitat for native lizards, birds and insects.

Our goal is to reduce our carbon emissions and to support New Zealand in meeting obligations under the Paris Agreement. Our Environmental Product Declaration provides us with a baseline and we will continually measure ourselves against this to track our carbon-reduction performance.



ABOUT

SUSTAINABILITY

WHERE WE PRODUCE OUR AGGREGATES

We have quarries in Bell Road, Clevedon, Drury, Poplar Lane, Tūākau, Tauhei and Waingaro.

This EPD covers Spec Concrete, Drainage, Sealing Chip & Basecourse products from our production site in Drury.



QUALITY CONTROL

Our quality control process is rigorous. We undertake comprehensive testing and provide advice to our customers around the correct application of our aggregate products.

Stevenson Aggregates Ltd are accredited to ISO 9001 certified by Telarc, for the design, manufacture and delivery of quarry aggregates and bulk transport services.

Our production quality control systems comply with the quality assurance requirements.

Stevenson operates an IANZ accredited civil engineering laboratory, ensuring all of our products meet the appropriate Australian and New Zealand standards.




AGGREGATES

PRODUCT LIFE CYCLE

This is a 'cradle-to-gate' type EPD. This means that the extraction and processing of raw material supply, transport of the raw materials to production site, and manufacturing stages are modelled in this EPD. The construction process (modules A4-A5), use stages (B1-B7) and end-of-life (C1-C4 and D) are not modelled.

Figure 1: Product life cycle ready-mix concrete

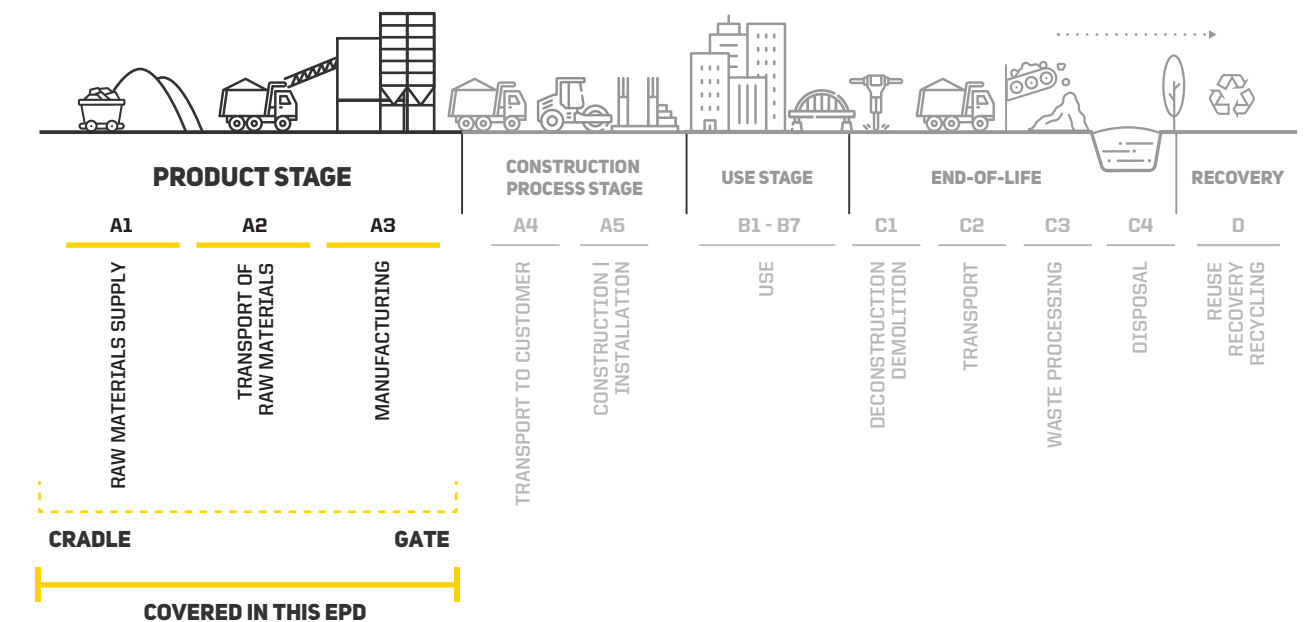

INNOVATION

Our experienced team is committed to innovation and the aggregates industry. Stevenson is represented on a range of organisations including the Aggregate and Quarry Association (AQA) and various transport infrastructure committees.

PRODUCTS INCLUDED IN THIS EPD

The products reported in this EPD (see Table 1) are grouped by the processing stages required and the site it's produced at. This means that all products within a group will have similar physical attributes, inputs, and outputs, leading to less variation in results.

Table 1: Products included in this EPD

DRURY	ACRONYM	PRODUCT NAME	CATEGORY
Spec Concrete, Drainage, Sealing Chip & Basecourse	ASP-6.7	Asphalt Chip 6.7mm	Asphalt Aggregate
	ASP-9.5	Asphalt Chip 9.5mm	Asphalt Aggregate
	ASP-13.2	Asphalt Chip 13.2 mm	Asphalt Aggregate
	ASP-16.0	Asphalt Chip 16.0mm	Asphalt Aggregate
	ASP-19.0	Asphalt Chip 19.0mm	Asphalt Aggregate
	Asphalt PAP	Asphalt PAP	Asphalt Aggregate
	BMG	Builders Mix General	Concrete Aggregate
	CA10	Concrete Aggregate 10	Concrete Aggregate
	CA13	Concrete Aggregate 13	Concrete Aggregate
	CA19	Concrete Aggregate 19	Concrete Aggregate
	GAP7	General All Passing 7	Basecourse
	PAP6	Premium All Passing 6	Concrete Aggregate
	RWB *subject to availability	Railway Ballast	Railway Ballast
	SCG2	SCG Grade 2 (19/10)	Sealing Chip
	SCG3	SCG Grade 3 (16/14)	Sealing Chip
	SCG4	SCG Grade 4 (14/10)	Sealing Chip
	SCG5	SCG Grade 5 (10/7)	Sealing Chip
	SCG6	SCG Grade 6 (7/3)	Sealing Chip
	TNZ40	TNZ M4 AP40 2006	Basecourse

PRODUCT COMPOSITION

According to the General Programme Instructions, the EPD shall include a content declaration with a list of materials and chemical substances including information on their hazardous properties. All aggregate products do not require any packaging.

Table 2: Material composition of Stevenson's aggregates

PRODUCT COMPONENTS	WEIGHT, KG	POST-CONSUMER RECYCLED MATERIAL, WEIGHT-%	BIOGENIC MATERIAL, WEIGHT-% AND KG C/KG
Crushed rock, sand, clay materials	1,000	0	0
Total	1,000	0	0

None of the materials in this EPD are on the Candidate List of substances of very high concern (SVHC), by the European REACH Regulation at a concentration greater than 0.1% by mass.

PRODUCT FUNCTION AND CATEGORY

Stevenson's aggregate products provide solutions for commercial, infrastructure, and residential use. Some of their functions include:



ROADING

Sealing chips, basecourses, sub-basecourses and subgrade aggregates manufactured for use in roads and heavy-duty pavements.



DRAINAGE

Permeable or blended aggregates in fine or coarse specifications for drainage or filter applications.



SAND

Sand and pumice aggregates produced in a range of specifications for use in a variety of applications including concrete manufacturing, sports turf and horticulture.



CONCRETE

Concrete aggregates manufactured for strength,superior particle shape, and consistency and workability.



SPECIALISED

Specialised products for use in landscaping, construction and infrastructure. Made to Order product options available.



DECLARED UNIT

EPDs that do not cover the full product life cycle from raw material extraction through to end-of-life use the term “declared unit”, rather than functional unit.

“Declared unit” will be used in the EPDs themselves and is defined as:
ONE TONNE (1 TONNE) OF PRODUCT.

INDUSTRY CLASSIFICATION

The UN CPC and ANZSIC codes applicable to Stevenson aggregate products in this EPD are shown in Table 3.

Table 3: The UN CPC and ANZSIC codes applicable to Stevenson aggregates

PRODUCT	CLASSIFICATION	CODE	CATEGORY
AGGREGATES	UN CPC Ver.2	15320	Pebbles, gravel, broken or crushed stone, macadam; granules, chippings and powder of stone
	UN CPC Ver.2	15310	Natural sands
	UN CPC Ver.2	15400	Clays
	ANZSIC 2006	0919	Aggregate quarrying
	ANZSIC 2006	0911	Sand quarrying, washing or screening
	ANZSIC 2006	0919	Clay quarrying

SYSTEM BOUNDARY

In Life Cycle Assessments (LCA), the system boundary is a line that divides the processes which are included from everything else. The system boundary of this EPD includes production ‘cradle-to-gate’, modules A1-A3.

The aggregate is physically integrated with other products during installation and cannot be physically separated from them at end of life. Aggrgate does not contain biogenic carbon.

Table 4: Modules of the production life cycle incl. in the EPD (X = module declared; ND = module not declared)

	PRODUCT STAGE			USE STAGE								END-OF-LIFE				RECOVERY	
	Raw material supply	Transport of raw materials	Manufacturing	Transport to customer	Construction / Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction / demolition	Transport to waste processing	Waste processing	Disposal	Future reuse, recycling or energy recovery potential
MODULE	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
MODULE DECLARED	x	x	x	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
GEOGRAPHY	NZ	NZ	NZ	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SPECIFIC DATA	83%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
VARIATION - PRODUCTS	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
VARIATION - SITES	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

PRODUCT STAGE

The product stage looks at the environmental impacts associated with manufacturing the aggregate products until it leaves the production site.


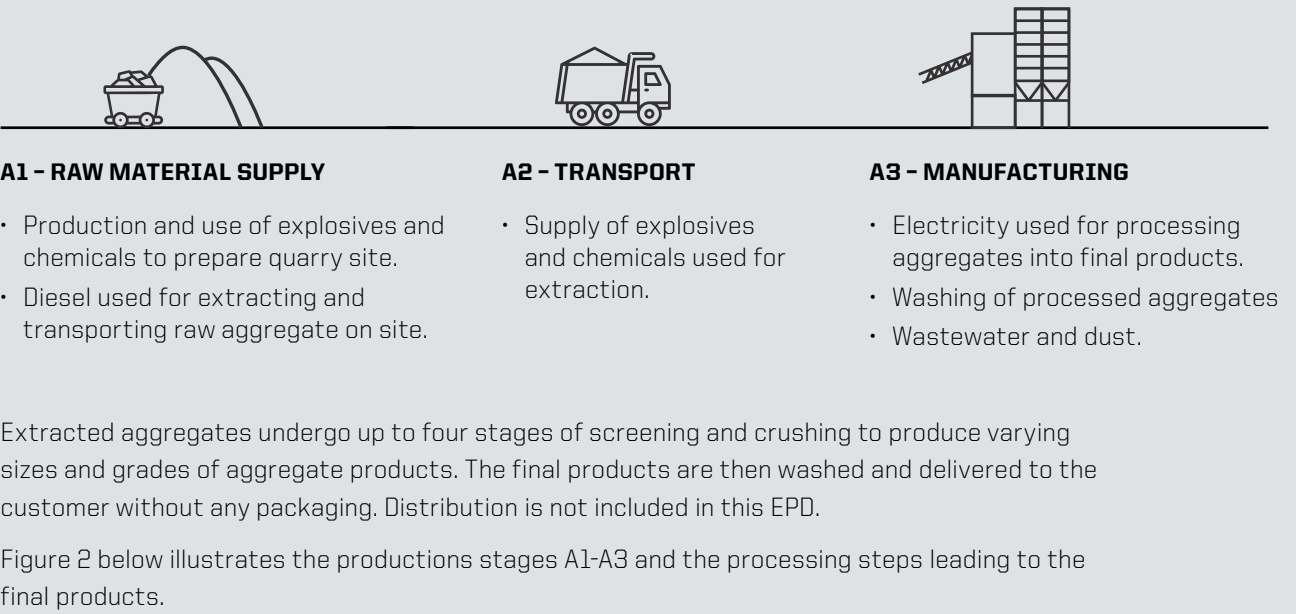


Figure 2: Production stages A1 - A3, processing steps and products.



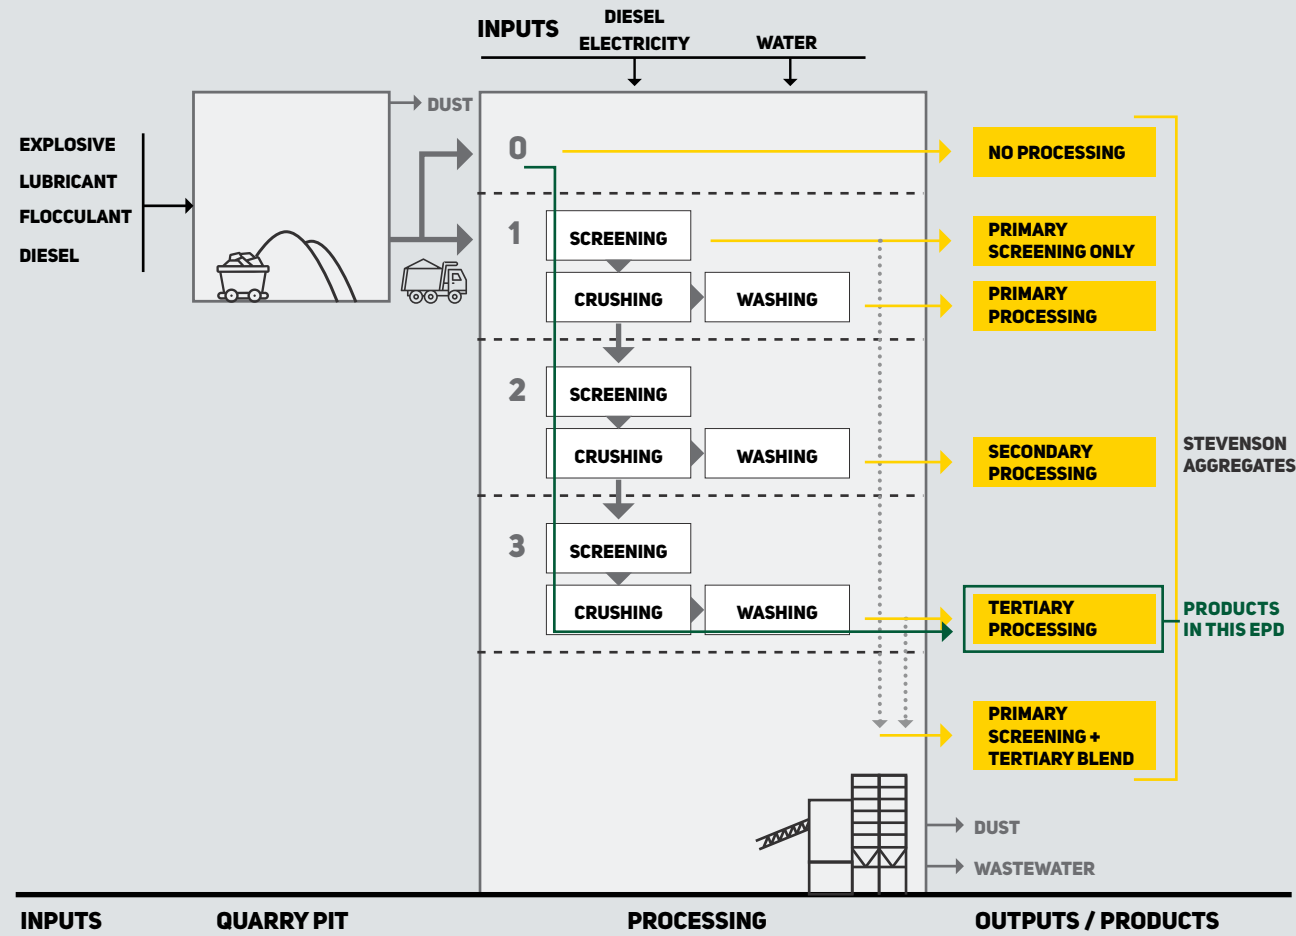

LIFE CYCLE INVENTORY (LCI) DATA AND ASSUMPTIONS

Primary data provided is representative of the production of aggregates during 1 July 2021 – 30 June 2022 at the Drury production site.

Background data for raw materials, energy, and transportation are all from the ecoinvent v3.10 database (Wernet, 2016) with reference years between 2020-2023. Both primary and background data fall within the EN 15804 and PCR requirements of 10 years for generic data and 5 years for producer specific data.

SOFTWARE AND DATABASE

The LCA was conducted in Microsoft Excel. The LCA utilises lifecycle inventory data from ecoinvent, Allocation, cut-off, EN15804, ecoinvent database version 3.10 (Wernet, 2016) for several of the raw and process materials obtained from the background system.

The ecoinvent datasets have not been adapted as they are provided in Excel and have not been used in conjunction with an LCA software. This includes capital goods and infrastructure as they are included in the background datasets provided by ecoinvent database for Excel and it is not possible to subtract them in Excel.



CUT OFF CRITERIA

Cut-off criteria is compliant with EN15804 6.3.5 and PCR 2019:14 (EPD International, 2024). For the processes within the system boundary, all available energy and material flow data have been included in the modelling. In cases where no matching life cycle inventories are available to represent a flow, proxy data have been applied based on conservative assumptions regarding environmental impacts.

The main raw materials are extracted from the quarries and do not have any packaging. Packaging for other raw materials is minimal and was excluded from the study.

ELECTRICITY

The composition of the residual electricity grid mix of New Zealand is modelled in LCA FE based on published data for the year 1st April 2021 – 31st March 2022 (BraveTrace, 2023). The New Zealand residual electricity mix is made up of hydro (56.6%), geothermal (19.7%) natural gas (12.5%), wind (6.55%), coal (4.25%), biomass (0.266%) and biogas (0.160%).

Onsite consumption (3.00%), and the medium voltage (1kV-60kV) grid's transmission and distribution losses (3.17%) are calculated based on data from the Ministry of Business, Innovation & Employment (MBIE, 2023).

The emission factor for the New Zealand residual grid mix for the GWP-GHG indicator is 0.156 kg CO₂e/kWh (based on EF3.1).

TRANSPORT

Raw materials used on site were all sourced within New Zealand and average distances from each supplier was calculated. Truck was used as the transport mode for all materials. The ecoinvent dataset used was transport, freight, lorry 7.5-16 metric ton, EURO3.

ALLOCATION

All primary data was collected at a site level and allocated to each relevant processing stage based on the production quantities. This includes data for electricity, diesel, explosive, flocculant, lubricant, and water. For products that require more than one processing stage, energy and materials used are accumulated from each previous stage.

Allocation of background data (energy and materials) taken from the ecoinvent databases is documented online at <https://ecoquery.ecoinvent.org/3.10/EN15804/search>.

ENVIRONMENTAL IMPACT INDICATORS

An introduction the core environmental impact indicators is provided below. The best-known effect of each indicator is listed in the descriptions and the abbreviations, in brackets, correspond to the labels in the following results tables.



CLIMATE CHANGE (GLOBAL WARMING POTENTIAL) [GWP-total, GWPf, GWPb, GWPluc]

A measure of greenhouse gas emissions, such as CO₂ and methane. These emissions are causing an increase in the absorption of radiation emitted by the earth, increasing the natural greenhouse effect. This may in turn have adverse impacts on ecosystem health, human health and material welfare. The Global Warming Potential (GWP) is split into three sub indicators: total (GWPt), fossil (GWPf), biogenic (GWPb), and land-use and land-use change (GWPluluc).



ACIDIFICATION POTENTIAL [AP]

Acidification Potential is a measure of emissions that cause acidifying effects to the environment. A molecule's acidification potential indicates its capacity to increase the hydrogen ion (H⁺) concentration in the presence of water, thus decreasing the pH value. Potential effects include fish mortality, forest decline, and the deterioration of building materials.



PHOTOCHEMICAL OZONE FORMATION POTENTIAL [POCP]

Photochemical Ozone Formation Potential gives an indication of the emissions from precursors that contribute to ground level smog formation, mainly ozone (O₃). Ground level ozone may be harmful to human health and ecosystems and may also damage crops. These emissions are produced by the reaction of volatile organic compounds (VOCs) and carbon monoxide in the presence of nitrogen oxides and UV light.



EUTROPHICATION POTENTIAL [EP-fw, EP-fm, EP-tr]

Eutrophication covers all potential impacts of excessively high levels of macronutrients, the most important of which are nitrogen (N) and phosphorus (P). In aquatic ecosystems where this term is mostly applied, this typically describes a degradation in water quality. Eutrophication can result in an undesirable change in the type of species that flourish and an increase the production of biomass. As the decomposition of biomass consumes oxygen, eutrophication may decrease the available oxygen level in the water column and threaten fish in their ability to respire.



ABIOTIC RESOURCE DEPLETION [ADP-mm, ADPf]

The consumption of non-renewable resources decreases the availability of these resources and their associated functions in the future. Depletion of mineral resources and non-renewable energy resources are reported separately. Depletion of mineral resources is assessed based on total reserves.



OZONE DEPLETION POTENTIAL [ODP]

Depletion of the ozone leads to higher levels of UVB ultraviolet rays reaching the earth's surface with detrimental effects on humans and plants. The Ozone Depletion Potential is a measure of air emissions that contribute to the depletion of the stratospheric ozone layer.



WATER USE [WDP]

Water scarcity is a measure of the stress on a region due to water consumption.



ENVIRONMENTAL
IMPACT INDICATORS

EN15804+A2 CORE ENVIRONMENTAL IMPACT INDICATORS

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. The EN 15804 reference package based on EF 3.1 is used.

Table 5: Environmental impact (EN15804+A2) covering modules A1-A3

EN15804+A2 - ENVIRONMENTAL INDICATORS			PRODUCT STAGE
INDICATOR	ABBR.	UNIT	A1-A3
Climate change - total	GWP-total	kg CO ₂ -eq.	4.69
Climate change - fossil	GWP-fossil	kg CO ₂ -eq.	4.69
Climate change - biogenic	GWP-biogenic	kg CO ₂ -eq.	0.00308
Climate change - land use and land use change	GWP-luluc	kg CO ₂ -eq.	0.00127
Ozone Depletion	ODP	kg CFC 11-eq.	9.49E-08
Acidification	AP	Mole of H ⁺ eq.	0.107
Eutrophication aquatic freshwater	EP-fw	kg P eq.	3.50E-04
Eutrophication aquatic marine	EP-fm	kg N eq.	0.0367
Eutrophication terrestrial	EP-tr	Mole of N eq.	0.530
Photochemical ozone formation	POCP	kg NMVOC eq.	0.116
Depletion of abiotic resources- minerals and metals **	ADP-mm	kg Sb-eq.	9.45E-06
Depletion of abiotic resources - fossil fuels *	ADP-fossil	MJ	86.7
Water use *	WDP	m³ world equiv.	1.32

*The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

**The results of the impact category abiotic depletion of minerals and metals, may be highly uncertain in LCAs that include capital goods/infrastructure in generic datasets, in case infrastructure/capital goods contribute greatly to the total results. This is because the LCI data of infrastructure/capital goods used to quantify these indicators in currently available generic datasets sometimes lack temporal, technological and geographical representativeness. Caution should be exercised when using the results of these indicators for decision-making purposes.



ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS

Optional environmental impact categories provide further information on environmental impacts.

Table 6: Additional environmental impact indicators covering modules A1-A3

EN15804+A2 - ADDITIONAL ENVIRONMENTAL INDICATORS			PRODUCT STAGE
INDICATOR	ABBR.	UNIT	A1-A3
Climate Change ^	GWP-GHG	kg CO ₂ -eq.	4.70
Respiratory inorganics	PM	Disease incidences	0.00573
Ionising Radiation - human health ~	IRP	kBq U235 eq.	0.0394
Eco-toxicity (freshwater) °	ETP-fw	CTUh	65.8
Human Toxicity, cancer **	HTPc	CTUh	1.99E-08
Human Toxicity, non-cancer **	HTPnc	CTUh	1.86E-08
Land use related impacts / soil quality **	SQP	Dimensionless	314

^ The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

~ This indicator is calculated using the characterisation factors from the IPCC AR5 report (IPCC 2013) and has been included in the EPD following the PCR.

° The results of the impact categories land use, human toxicity (cancer), human toxicity, noncancer and ecotoxicity (freshwater) may be highly uncertain in LCAs that include capital goods/infrastructure in generic datasets, in case infrastructure/capital goods contribute greatly to the total results. This is because the LCI data of infrastructure/capital goods used to quantify these indicators in currently available generic datasets sometimes lack temporal, technological and geographical representativeness. Caution should be exercised when using the results of these indicators for decision-making purposes.

RESOURCE USE INDICATORS

The resource use indicators describe the use of renewable and non-renewable material resources, renewable and non-renewable primary energy and water.

Table 7: Resource use impact indicators covering modules A1-A3

INVENTORY INDICATORS - RESOURCE USE			PRODUCT STAGE
INDICATOR	ABBR.	UNIT	A1-A3
Renewable primary energy as energy carrier	PERE	MJ	20.3
Renewable primary energy resources as material utilization	PERM	MJ	0
Total use of renewable primary energy resources	PERT	MJ	20.3
Non-renewable primary energy as energy carrier	PENRE	MJ	53.3
Non-renewable primary energy as material utilization	PENRM	MJ	29.8
Total use of non-renewable primary energy resources	PENRT	MJ	83.1
Use of secondary material	SM	kg	0.0233
Use of renewable secondary fuels	RSF	MJ	7.16E-04
Use of non-renewable secondary fuels	NRSF	MJ	0
Use of net fresh water	FW	m³	0.858

WASTE MATERIAL AND OUTPUT FLOW INDICATORS

Waste indicators describe waste generated within the life cycle of the product. Waste is categorised by hazard class, end-of-life fate and exported energy content.

Table 8: Waste categories and output flow indicators covering modules A1-A3

INVENTORY INDICATORS - WASTE MATERIAL AND OUTPUT FLOW			PRODUCT STAGE
INDICATOR	ABBR.	UNIT	A1-A3
Hazardous waste disposed	HWD	kg	0.138
Non-hazardous waste disposed	NHWD	kg	2.01
Radioactive waste disposed	RWD	kg	9.58E-06
Components for re-use	CRU	kg	0
Materials for recycling	MFR	kg	8.03E-04
Materials for energy recovery	MER	kg	2.44E-06
Exported electrical energy	EEE	MJ	0.00335
Exported thermal energy	EET	MJ	0.00370

BIOGENIC CARBON CONTENT

1 kg biogenic carbon is equivalent to 44/12 kg CO₂.

Table 9: Biogenic carbon content covering modules A1-A3

INVENTORY INDICATORS - BIOGENIC CARBON CONTENT			PRODUCT STAGE
INDICATOR	ABBR.	UNIT	A1-A3
Biogenic carbon content - product	BCC-prod	kg	0
Biogenic carbon content - packaging	BCC-pack	kg	0

VARIABILITY OF RESULTS

Since the primary data for this EPD is based on a distinct site and processing stage and has been equally allocated by mass, all products included in this EPD have the same results per tonne of aggregate.

Therefore, there is no range or variation in results between products included in this EPD.



Life Cycle

A view of a product system as “consecutive and interlinked stages ... from raw material acquisition or generation from natural resources to final disposal” (ISO 14040:2006, section 3.1). This includes all material and energy inputs as well as emissions to air, land and water.

Life Cycle Assessment (LCA)

“Compilation and evaluation of the inputs, outputs and the potential environmental impacts of a product system throughout its life cycle” (ISO 14040:2006, section 3.2)

Life Cycle Inventory (LCI)

“Phase of life cycle assessment involving the compilation and quantification of inputs and outputs for a product throughout its life cycle” (ISO 14040:2006, section 3.3)

Environmental Product Declaration (EPD)

“Independently verified and registered document that communicates transparent and comparable information about the life-cycle environmental impact of products.” (EPD Australasia Ltd, 2023)

Product Category Rule (PCR)

“Provide the rules, requirements, and guidelines for developing an EPD for a specific product category.” (EPD International AB, 2024)

Functional / Declared Unit

“Quantified performance of a product system for use as a reference unit.” (ISO 14040:2006, section 3.20)

Functional unit = LCA/EPD covers entire life cycle “cradle to grave”.

Declared unit = LCA/EPD is not based on a full “cradle to grave” LCA, common in construction product EPDs.

Allocation

“Partitioning the input or output flows of a process or a product system between the product system under study and one or more other product systems” (ISO 14040:2006, section 3.17)

CEN. (2019). EN 15804:2012+A2:2019 Sustainabiltiy of construciton works. Environmental product declarations. Core rules for the product category of construction products. Brussels: European Committee for Standardization.

EPD Australasia. (2024). Instructions of the Australasian EPD Programme V4.2. Nelson: EPD Australasia Ltd.

EPD Australasia Ltd. (2023). What is an EPD? Retrieved from EPD Australasia: <https://epd-australasia.com/what-is-an-epd/>

EPD International. (2021). General Programme Instructions for the International EPD(r) System. Version 4.0, dated 2021-03-29. Stockholm: EPD International.

EPD International. (2024). PCR 2019:14 Construction Products version 1.3.4 of 2024-04-30. Stockholm: EPD International.

EPD International AB. (2024). The PCR. Retrieved from EPD International: <https://www.environdec.com/product-category-rules-pcr/the-pcr>

IPCC. (2013). Climate Change 2013: The Physical Science Basis. Geneva, Switzerland: IPCC.

ISO. (2006a). ISO 14040: Environmental management – Life cycle assessment – Principles and framework. Geneva: International Organization for Standardization.

ISO. (2006b). ISO 14044: Environmental management – Life cycle assessment – Requirements and guidelines. Geneva: International Organization for Standardization.

ISO. (2006c). ISO 14025: Environmental labels and declarations - Type III environmental declarations - Principles and procedures. Geneva: International Organization for Standardization.

Wernet, G. B.-R. (2016). The ecoinvent database version 3 (part I): overview and methodology. The International Journal of Life Cycle Assessment, 21(9)([online]), 1218–1230.



EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison.

For further information about comparability, see EN 15804 and ISO 14025.

PROGRAMME-RELATED INFORMATION AND VERIFICATION

DECLARATION OWNER	Stevenson	
	Post: Private Bag 94000, Manukau City Auckland, 2241, New Zealand	
	Web: stevenson.co.nz	
	Email: action@stevenson.co.nz	
GEOGRAPHICAL SCOPE	New Zealand	
REFERENCE YEAR	2021-07-01 to 2022-06-30	
EPD PRODUCED BY	thinkstep ltd Barbara Nebel Noa Meron Edwin Chu	
	Post: 11 Rawhiti Road, Pukerua Bay, 5026 Wellington, New Zealand	
	Web: thinkstep-anz.com	
	Email: info@thinkstep-anz.com	
EPD PROGRAMME	The International EPD® System	
	Operator: EPD International AB	
	Post: EPD International AB, Box 210 60, SE-100 31 Stockholm, Sweden	
	Web: www.environdec.com	
	Email: info@environdec.com	
REGIONAL PROGRAMME	EPD Australasia Limited	
	Post: 315a Hardy Street 7010 Nelson, New Zealand	
	Web: www.epd-australasia.com	
	Email: info@epd-australasia.com	
CEN STANDARD EN 15804+A2 SERVE AS THE CORE PRODUCT CATEGORY RULES (PCR)		
PCR	PCR 2019:14 Construction Products version 1.3.4	
PCR REVIEW WAS CONDUCTED BY	The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Review Chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact.	
INDEPENDENT VERIFICATION OF THE DECLARATION AND DATA, ACCORDING TO ISO 14025:	☐ EPD process certification (Internal) ☒ EPD verification by individual verifier(External)	
THIRD PARTY VERIFIER, APPROVED BY EPD AUSTRALASIA	Life Cycle Logic Pty Ltd Andrew D. Moore	
	Post: PO Box 571 Fremantle WA 6959 Australia	
	Web: lifecyclelogic.com.au	
	Email: Andrew@lifecyclelogic.com.au	
PROCEDURE FOR FOLLOW-UP OF DATA DURING EPD VALIDITY INVOLVED THIRD-PARTY VERIFIER	☐ yes ☒ no	
VERSION HISTORY	1.0	



CONTACT

For more information about
Stevenson Aggregates visit:
stevenson.co.nz

STEVENSON
■■■■■